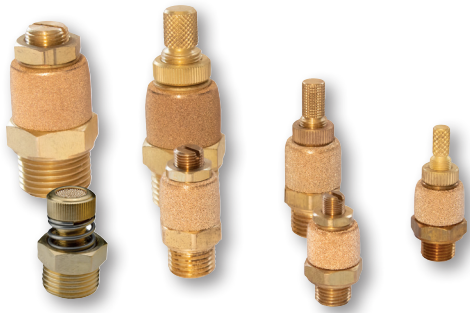


## Discharge regulators

Connection: 1/8", 1/4", 3/8", 1/2", 3/4", 1"

### DISCHARGE REGULATORS


 Version with screwdriver,  
knob or screw adjustment

One-way discharge regulation

 Passivated brass body and components  
Sintered bronze silencer


Direct assembly on cylinders or valves

#### TECHNICAL FEATURES

<b>Operation</b>	Adjustment by knob, screw or screwdriver - One-way control in discharge
<b>Regulation</b>	Manual with knob and locking ring nut - Manual with screwdriver
<b>Materials</b>	Passivated brass body and control unit - NBR gaskets - Sintered bronze silencer
<b>Note on materials</b>	Compliant with REACH (1907/2006/EC and subsequent amendments)
<b>Connections</b>	1/8", 1/4", 3/8", 1/2", 3/4", 1" Gas
<b>Threads</b>	Cylindrical Gas (BSPP)
<b>Operating temperature</b>	0°C ÷ 80°C (-20°C with dry air, to avoid ice formation)
<b>Operating pressure</b>	0 ÷ 10 bar
<b>Fluid</b>	Filtered air, lubrication-free, compliant with ISO 8573-1:2010 [7:4:4]
<b>Lubrication</b>	Not required (if required in the pneumatic circuit, it must be continuous)


### DISCHARGE REGULATORS

#### MANUAL ADJUSTMENT WITH KNOB AND LOCKING RING NUT




Symbol	A	Code	B	Ø C	Ch	D
	Gas 1/8"	SBRM/8	6.5	14	14	42
	Gas 1/4"	SBRM/4	9	16	16	51
	Gas 1/2"	SBRM/2	12	23	23	67

#### MANUAL ADJUSTMENT WITH SCREWDRIVER



Symbol	A	Code	B	Ø C	Ch	D
	Gas 1/8"	SBRC/8	6.5	14	14	34
	Gas 1/4"	SBRC/4	9	16	16	41
	Gas 1/2"	SBRC/2	12	23	23	57

#### MANUAL ADJUSTMENT WITH SCREW AND LOCKING SPRING



Symbol	A	Code	B	Ø C	Ch	D
	Gas 1/8"	60140 18	6	12	13	26 ÷ 28
	Gas 1/4"	60140 14	8	14	15	30 ÷ 32
	Gas 3/8"	60140 38	10	17	18	35 ÷ 38
	Gas 1/2"	60140 12	11	18	22	36 ÷ 39
	Gas 3/4"	60140 34	12	28	30	45 ÷ 50
	Gas 1"	60140 11	12	32	36	45 ÷ 50