


## Cylinders according to ISO 15552 standards - Series CX

Bores Ø : 32 - 40 - 50 - 63 - 80 - 100 - 125 mm.

### SERIES CX

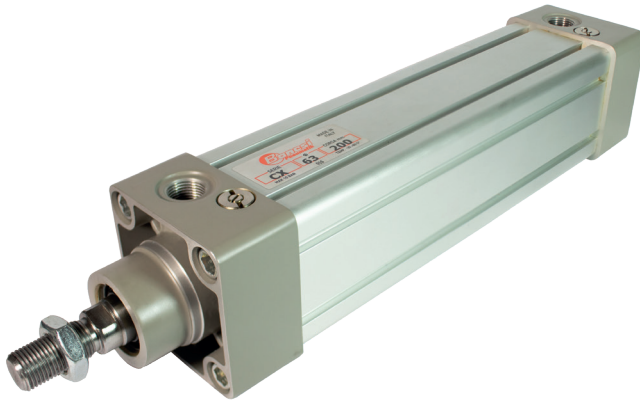

Robust cylinders for heavy duty application

According to ISO 15552 standards

Caps in die-cast aluminium, epoxy painted

Piston rod in steel C45, grounded and hard chromium plated

Profiled tube in anodized aluminium, internally gauged

"T" grooves for sensors, on one side

Adjustable end of stroke pneumatic cushions

Complete piston in NBR vulcanized Aluminium piston with NBR seals

Sensors and mounting accessories

### TECHNICAL FEATURES

<b>Construction</b>	Caps fixed on profiled tube by bolts
<b>Function</b>	Double acting, single acting on request
<b>Standard materials</b>	Caps in die-cast aluminium epoxy painted, piston rod in steel C45 grounded and hard chromium plated. Profiled tube in anodized aluminium internally gauged, complete piston/aluminium piston. Seals in NBR - PU
<b>Note about the materials</b>	According to Directive REACH (1907/2006/CE and s.a.s.)
<b>Bores</b>	Ø 32, 40, 50, 63, 80, 100, 125 mm
<b>Standard strokes (min. - max.)</b>	Ø 32: 25 mm ÷ 400 mm Ø 40, 50: 25 mm ÷ 400 mm Ø 63, 80: 25 mm ÷ 600 mm Ø 100, 125: 50 mm ÷ 1000 mm
<b>Special strokes (on request)</b>	Up to 3000 mm
<b>Working temperature</b>	0 ÷ 80°C (standard seals, -20°C with dry air, in order to avoid formation of ice) 0 ÷ 150°C (option in FKM, -20°C with dry air, in order to avoid formation of ice)
<b>Working pressure</b>	0,5 ÷ 10 bar
<b>Fluid</b>	Filtered air without lubrication, according to ISO 8573-1:2010 [7:4:4]
<b>Speed</b>	10 ÷ 1000 mm/sec

### CERTIFICAZIONE ATEX

<b>Cylinder marking</b>	CE Ex II 2G Ex h IIC T6 Gb CE Ex II 2D Ex h IIIC 85°C Db	(Zona 1 e Zona 2) (Zona 21 e Zona 22)
<b>Operating pressure in ATEX environment</b>	0,5 ÷ 10 bar	
<b>Temperature in ATEX environment</b>	-20°C ≤ Ta ≤ +60°C	
<b>CE marking</b>	According to Directive 2014/34/EU (see declaration of conformity)	

### TECHNICAL FEATURES

Bore Ø (mm)	32	40	50	63	80	100	125
Ports (gas)	1/8"	1/4"	1/4"	3/8"	3/8"	1/2"	1/2"
Piston rod Ø (mm)	12	16	20	20	25	25	32
Thread of the piston rod (male)	M10 x 1,25	M12 x 1,25	M16 x 1,5	M16 x 1,5	M20 x 1,5	M20 x 1,5	M27 x 2
Theoretical push thrust at 6 bar (N)	482	754	1178	1870	3016	4710	7363
Theoretical pull thrust at 6 bar (N)	414	633	990	1680	2722	4416	6882
Air consumption at 6 bar in push (Nl/cm)	0,056	0,088	0,137	0,218	0,350	0,550	0,860
Air consumption at 6 bar in pull (Nl/cm)	0,048	0,074	0,114	0,195	0,320	0,510	0,790
Cushioning stroke (mm)	18	23	27	33	33	33	33